


SETUP

- 1 Connect the antenna to the back of the AutoPlus and tighten by turning clockwise. Position the antenna to a straight up position.



- 2 Plug the Ethernet cord into your router and connect the other end to the back of the AutoPlus.

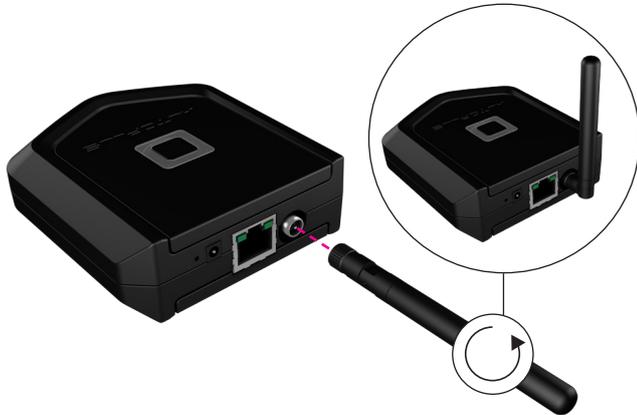

- 3 Connect the power cable to the AutoPlus and plug the power adapter into a working outlet.



Requirements:

Internet Service.
Router with available ethernet port.
Active Autoslide owner account for AutoSlide, MultiDrive, or AutoSwing.

- 4 Compare the lights on the AutoPlus to the LED Logo Indicator chart on page 2 to ensure they are functioning properly.



- 5 Complete your AutoPlus setup by following the “Pair a Device” instructions in the Autoslide app.

Check these before beginning the pairing process for AutoPlus:

- An AutoSlide, MultiDrive, or AutoSwing is installed and paired successfully to your phone as the owner.
- Latest version of the AutoSlide app is downloaded and installed on your phone.
- AutoPlus is connected to the router and a live internet connection.

- 6 After configuration, control your doors with the Autoslide app.

To test the Autoslide app, open the app, select your device, and press Inside to activate a door opening.



Color	Meaning
White (solid)	Starting up
White (fade in and out)	Ready to pair
Blue	Normal operation
Amber (blinking)	Factory reset
Red	Not connected to internet
Magenta	Searching for Smart Lock
Amber (fade in, fade out)	Firmware download in progress
Amber (rapid blinking)	Updating firmware

Reset the AutoPlus

Reset your AutoPlus Gateway by gently inserting a paperclip into the pinhole on the back of the unit. This will change the LED status to blue and then back to white.

The LED will briefly flash amber while the AutoPlus is resetting and rebooting.



autoslide.com