


REVERSING THE MOTOR


Re-handing the system (reversing the position of the motor and the control unit) is required if floor mounting onto a left-opening door.

Re-handing should be done prior to starting the installation process. Note that if re-handing the system, the unit's left endcap with the power port may be up against a wall when mounted and inaccessible. Be sure to plug the power cable into the unit endcap's power port before mounting the unit if needed.


- 1) Unplug all cables from the control panel. Unscrew the two screws from the right unit endcap (the endcap without a power port) and remove the endcap.

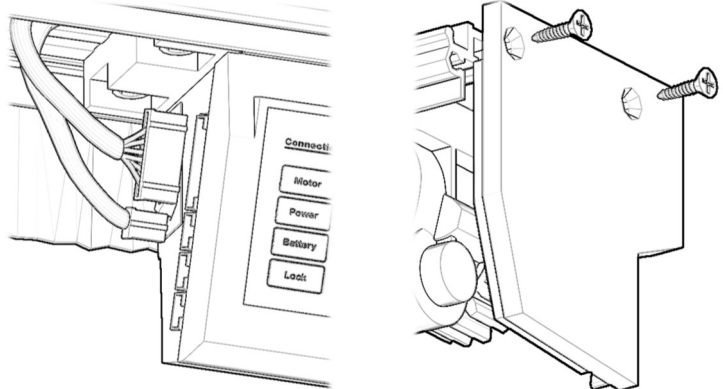

- 2) Use the included Allen key to remove the bolt opposite the motor wheel. Slide out the motor wheel.

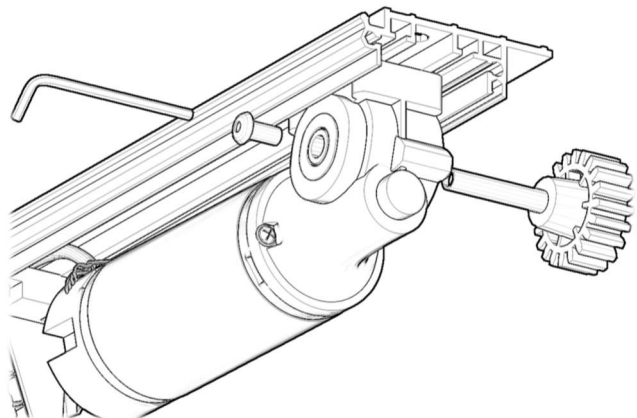

- 3) Insert the motor wheel on the opposite side of the motor and tighten the bolt using Allen key.

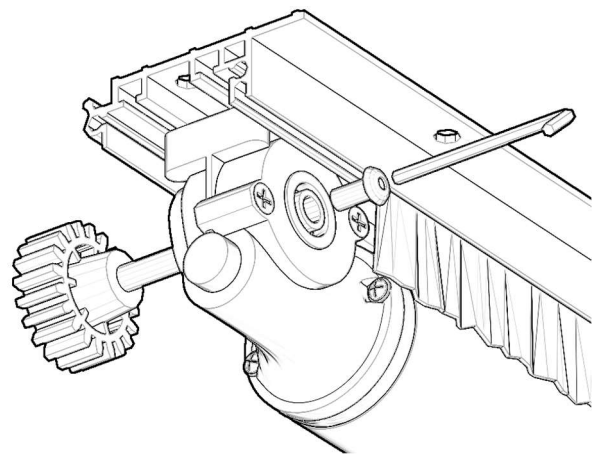


07

REHANDING


REVERSING THE AUTOSLIDE

SWITCHING THE MOTOR AND CONTROL UNIT


- 4) Remove the four screws holding the motor to the unit base. Use the Allen key to remove the four bolts holding the control panel to the unit base.

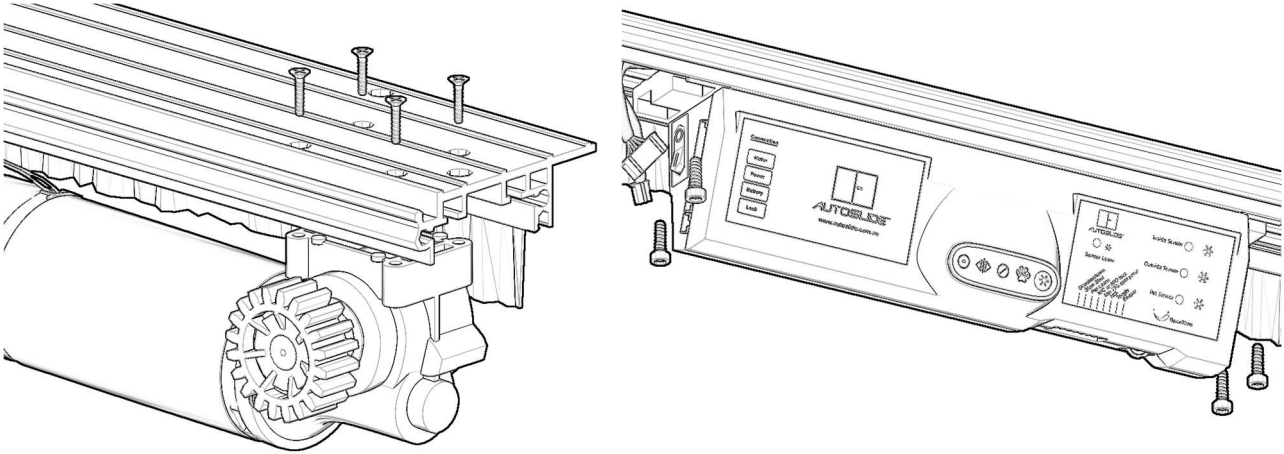

- 5) Slide the base brush and metal bars to the opposite side.


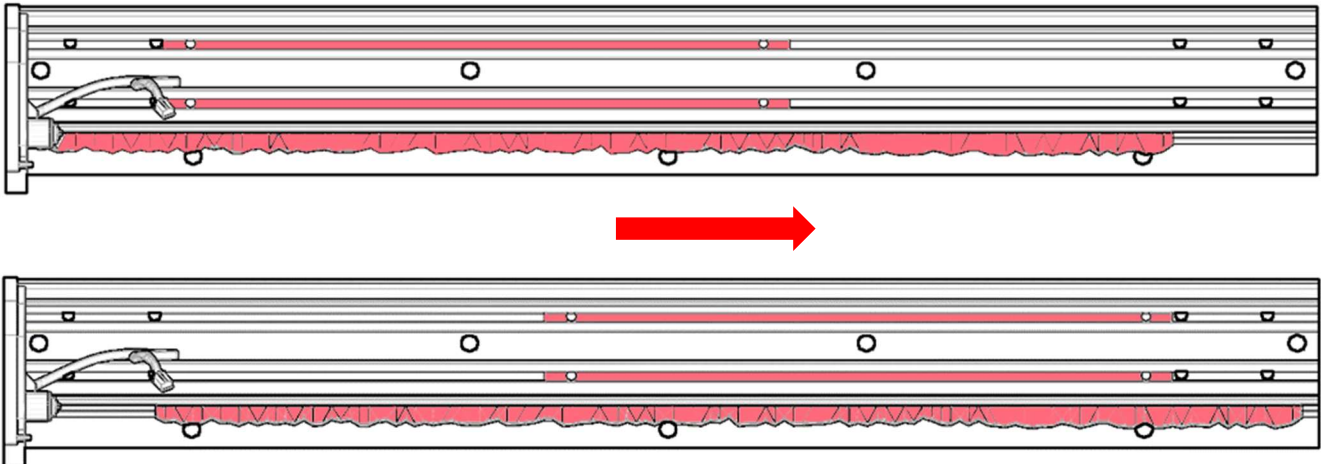


- 6) Place the power cable in extruded recessed area. Unit is shown upside down below.


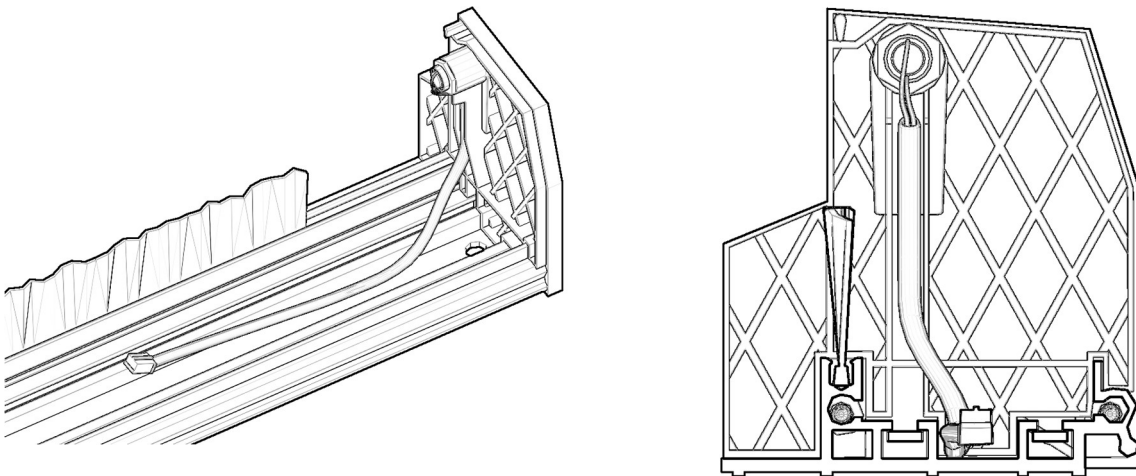


SWITCHING THE MOTOR AND CONTROL UNIT


- 7) Re-attach the motor to the unit base on the opposite side, so it sits above the power cable without damaging it.

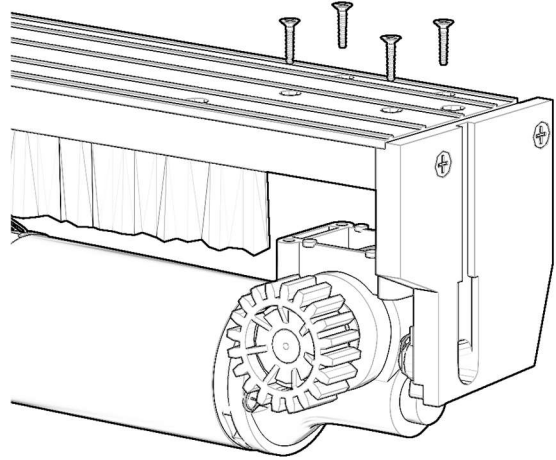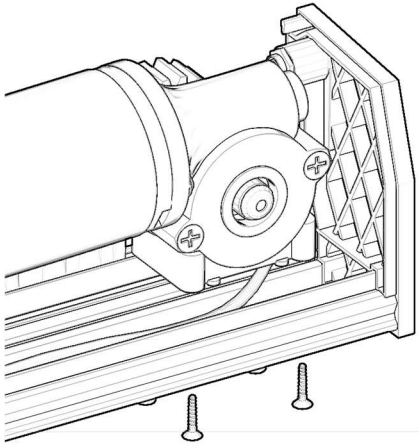

- 8) Reattach the control panel to the metal bars in the unit base using the Allen key. **Do not tighten completely.**

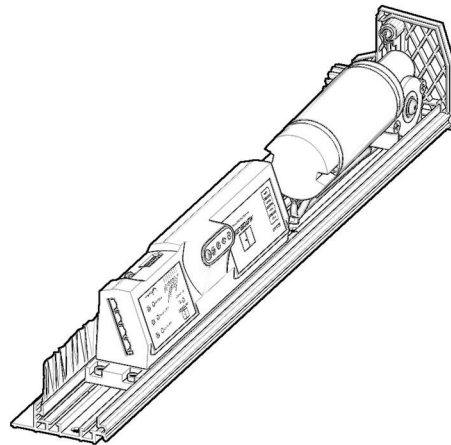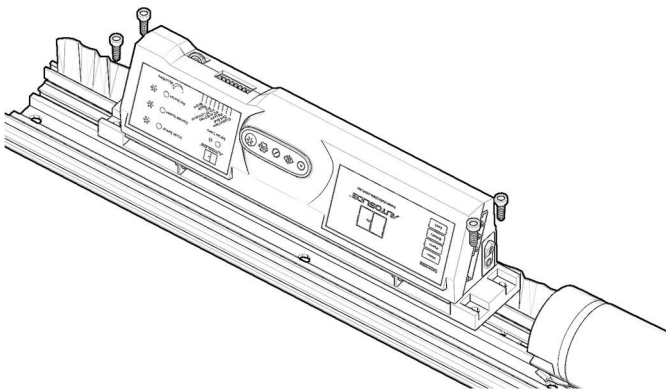


- 9) Re-secure the right endcap to the unit.

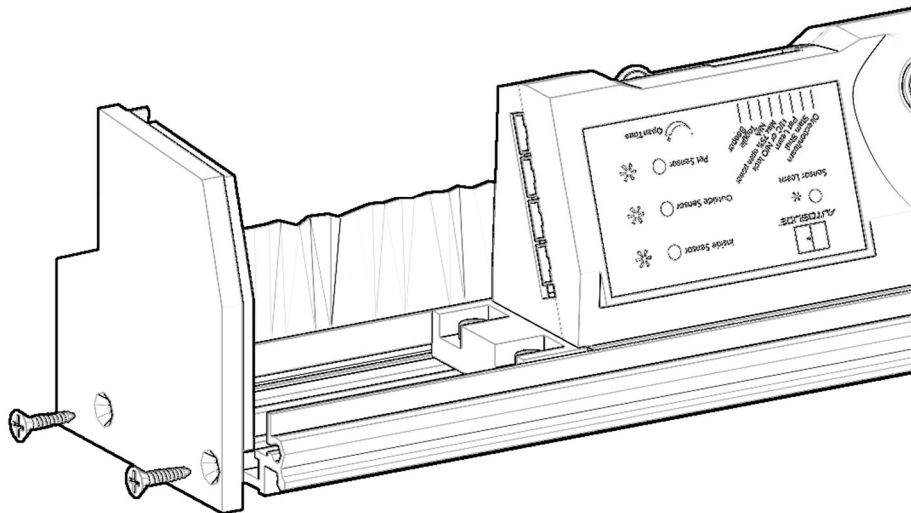


COMPLETING RE-HANDING

10) Plug the motor and power cables back into their corresponding ports on the control panel.

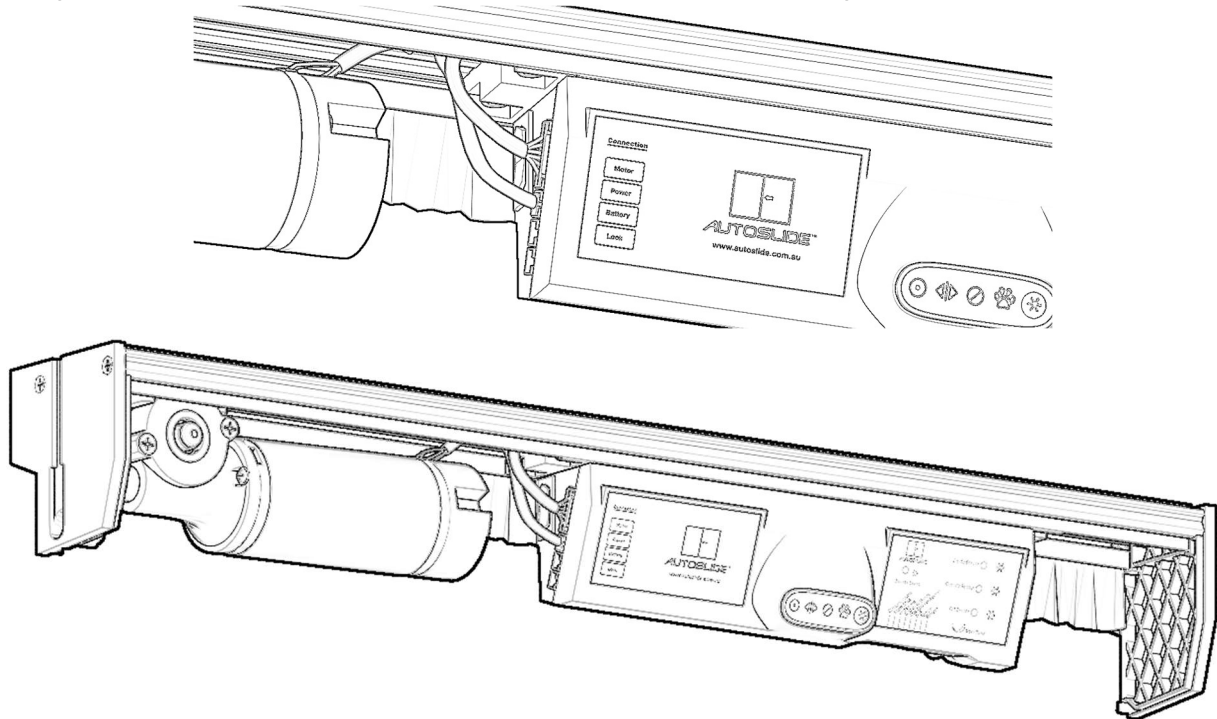

The logo clip on the unit cover can be popped out and put into the opposite cut hole on the cover.

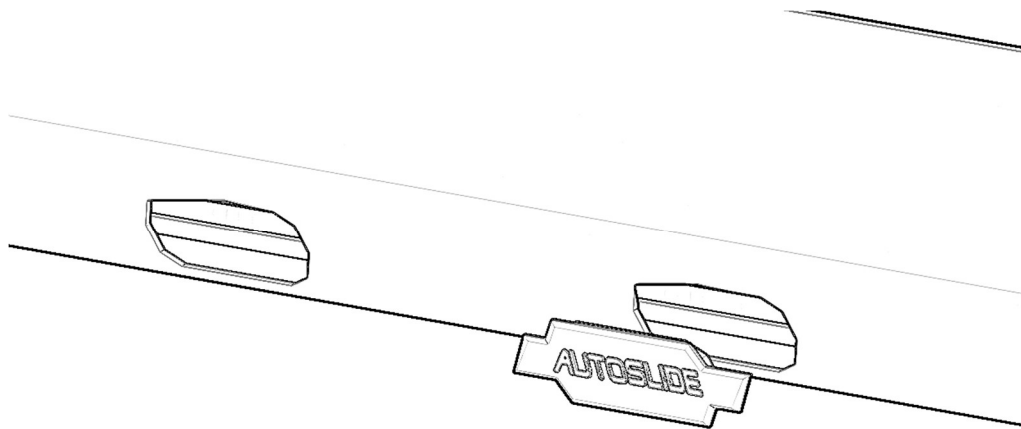

Note: Aligning the mode control pad to the cut in the unit cover may require some slight adjustment to the left or right of the control panel. Once aligned properly, tighten the four Allen key bolts holding the control panel in place. The unit is now re-handed and ready for install.